

# Enervent Pelican


COMPREHENSIVE TECHNICAL DETAILS



***enervent***

# Enervent Pelican

The Enervent Pelican unit is best suited for large detached houses or public spaces, like offices. Pelican is the smallest unit in our range that can be fitted with a built-in extract air heat pump (HP). All heating and cooling coils, as well as the heat pump unit, are built-in to the unit. The Pelican HP with a built-in heat pump cools and heats the air on demand. The cooled and heated air is evenly distributed throughout the building via the ventilation ducts (not local point formed distribution, as in traditional heat pumps).

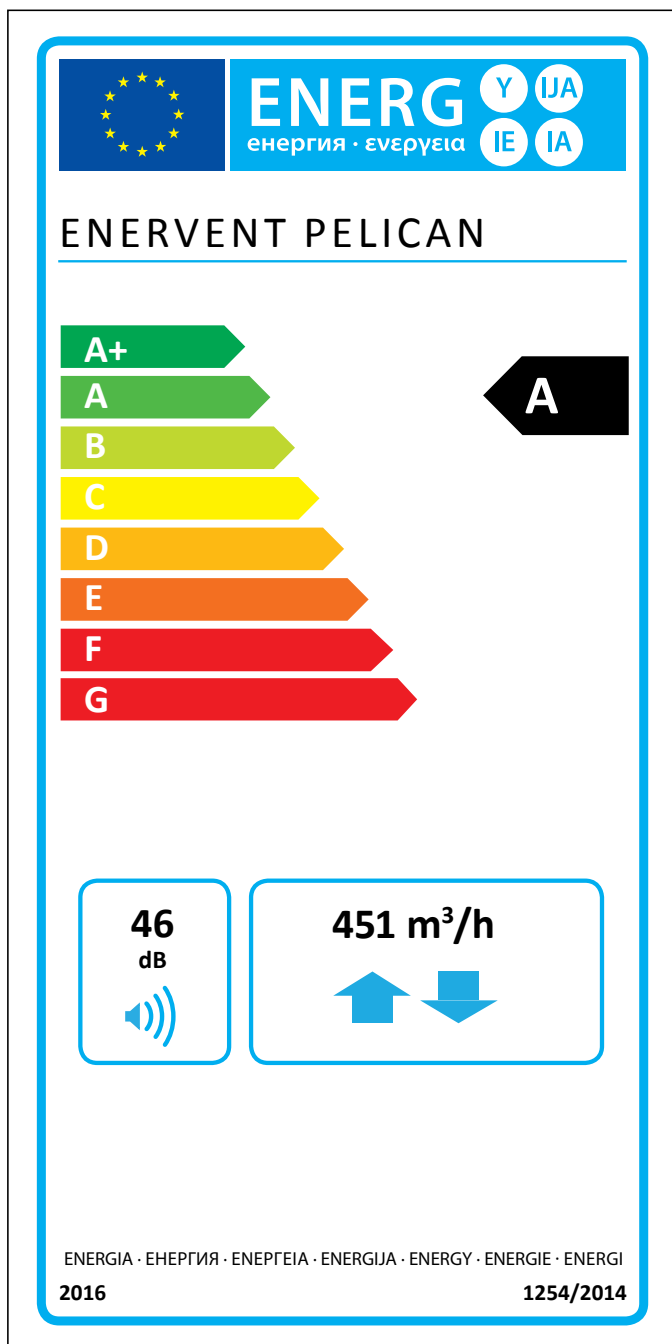

The information on the energy label for this product has been defined with local demand control. Local demand control means that the ventilation unit continuously regulates the fan speed(s) and flow rates based on more than one sensor. Please remember to connect all local sensors (some sold as extra equipment) in order to achieve the declared energy class.

## Technical details

### General information

Reference flow rate according to EcoDesign directive (50 Pa)	451 m <sup>3</sup> /h
Air volume flow	50...475 m <sup>3</sup> /h
Pressure difference	25 to 125 Pa
Leakage	external < 5% (test pressure 300Pa) internal < 5%
Duct size	Ø 200 mm
Weight	125 kg
Standard filters, 2 x bag filter Filter dimensions (WxHxD)	M5/M5 Supply 519 x 195 x 340 mm Extract 460 x 195 x 350 mm
Alternative filter 2x bag filter Filter dimensions (WxHxD)	F7/M5 or F7/F7 Supply 519 x 195 x 340 mm Extract 460 x 195 x 350 mm
IP class	IP44 (external control IP20)
Water heating coil connections	Intake/return 15 mm
Water cooling coil connections	Intake/return 15 mm
Evaporator connections	Intake ½", return 15 mm
Condense connection	¼" internal thread
Nominal voltage	230 V
Nominal current	Motors 2.4 A total Electrical after heating 8.7 A

### Fans

Supply and exhaust air fan type	Ebm-Papst
Supply and exhaust air motor type	D3G146-AH50-01 (EC type)
Nominal voltage	230 V (AC)
Type of fan blade	Radial forward
Nominal power	170 W
Acoustical data	67 dB(A) DIN 45635-1 ISO 3745
Fan control ECC/ESC control	4 step (parallel running, possibility to drive supply -20% lower to +10% higher than exhaust). Each step can be adjusted within 20% scale.
Fan control EDA/MD control	Stepless (supply and exhaust running separately)

### Heat exchanger


Heat exchanger type	Rotating heat exchanger
Material	Aluminium
Heat exchanger surface	70 m <sup>2</sup>
Heat exchanger dimensions	450 x 200 (60 µ)
Heat exchanger motor	6 W
Heat exchanger efficiency	75 – 85 % p.a.

### Other information

Material inside cover	Steel sheet, zinc coated
Material outside cover	Steel sheet, zinc coated, powder painted
Sound level in supply air duct at fan speeds 20, 40, 60, 80 and 100% LWA	-, 31, 42, 48, 52 dB(A)
LPA, dB(A), 10 m <sup>2</sup> : sound absorption	-, 27, 38, 44, 48 dB(A)
Standard electric after heater efficiency	2 000 W
Positioning of a cooling (CG) coil	Built-in






## Dimension drawings

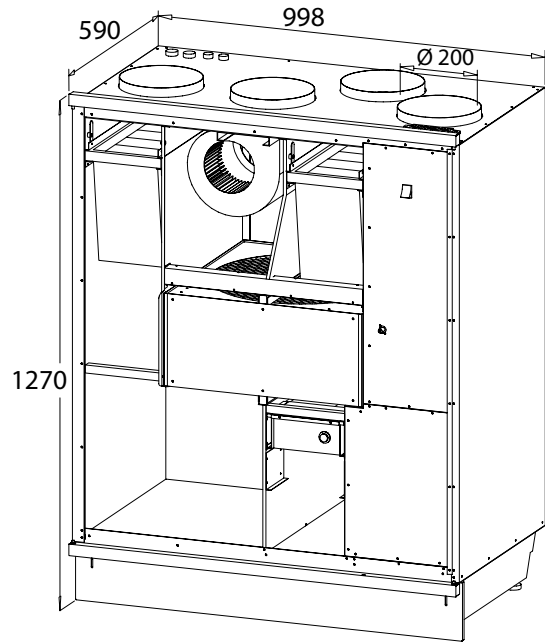

## Characteristics

Pelican supply and extract air characteristic curves with M5/M5 filters

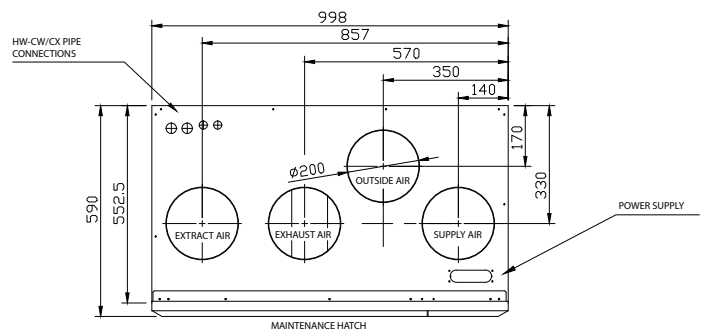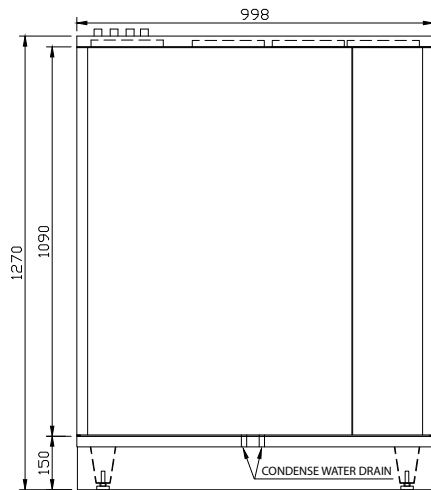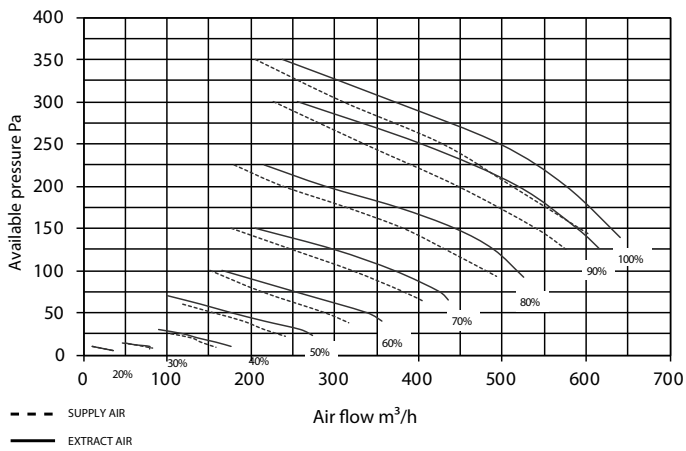

## Installation

Mounting	Floor	X	Wall	Ceiling
Frame alternatives			Right	X
				Left

Enervent Oy  
Kipinätie 1, FI-06150 PORVOO  
Tel +358 207 528 800  
enervent@enervent.com  
www.enervent.com

***enervent***